



S52 WAFER TYPE BUTTERFLY VALVE

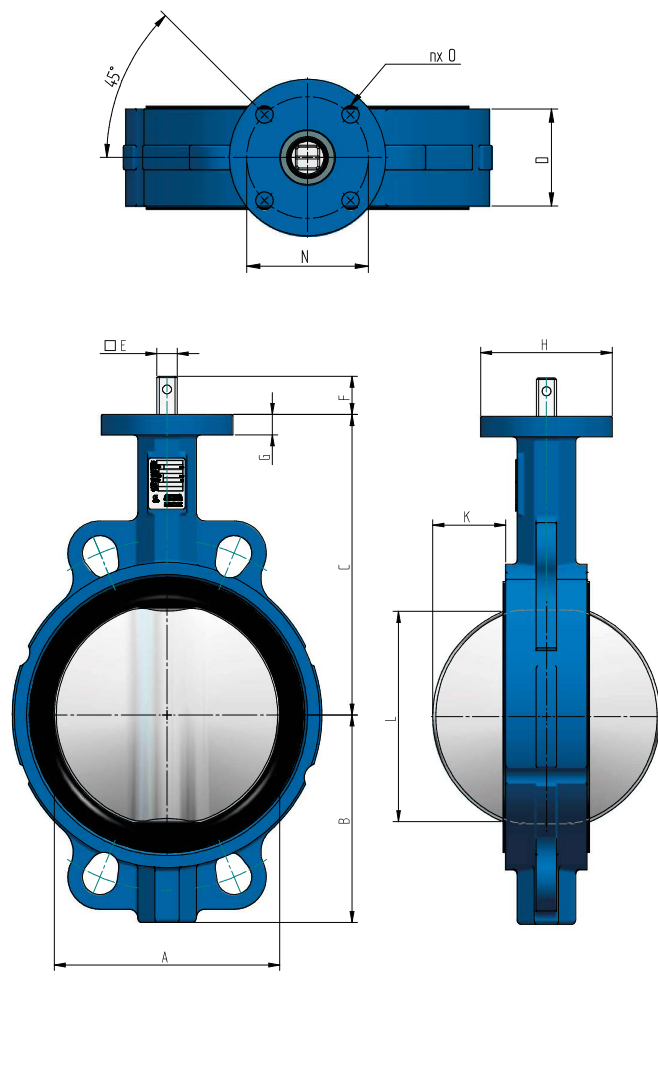

Pressure class, 16 bar
 Design according EN 593
 Face to face Wafer short,
 acc. EN558-1/2 Series 20 / API 609 A
 Flange connections options: EN 1092 PN 6, 10 and 16
 ASME B16.5 cl. 150
 JIS 5K/10K/16K
 Material options: Body material Ductile iron EN-JS1030
 Disc material Stainless steel 1.4408 or B148 C954
 Shaft material SS 416
 Liner material EPDM / NBR – Cartridge design
 Lever material JS1030 with steel Notch plate

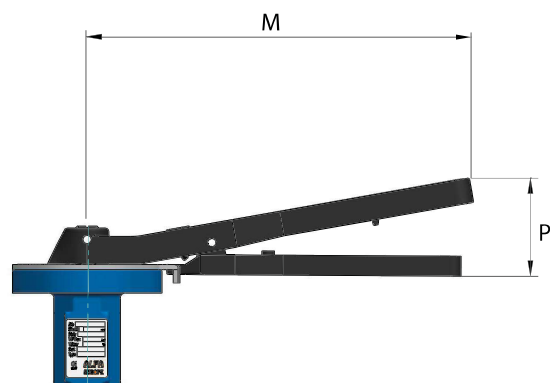

DN	NPS	øA	E	F	B	C	øH	D	M	P	N (PCD)	N x O	G	L	K	Weight kg (bare shaft)	Gearbox	R	S	ØT	Z
40	1 1/2"	40	11	25	61	130	90	33	232	57,5	70 (F07)	4xØ10	10	23	3,5	3,65	S02-C100	124	32	100	65
50	2"	50	11	25	69	141	90	42	232	57,5	70 (F07)	4xØ10	13	30	4,7	3,75	S02-C100	124	32	100	65
65	2 1/2"	65	11	25	77	150	90	46	232	57,5	70 (F07)	4xØ10	13	49	11	4,1	S02-C100	124	32	100	65
80	3"	80	11	25	98	157	90	46	232	57,5	70 (F07)	4xØ10	13	68	18	5,1	S02-C100	124	32	100	65
100	4"	102	11	25	118	168	90	52	232	57,5	70 (F07)	4xØ10	14	90	26	7	S02-C100	124	32	100	65
125	5"	125	14	28	129	191	90	56	329	69	70 (F07)	4xØ10	14	114	35	10,6	S02-C150	124	32	150	65
150	6"	150	14	28	140	206	90	56	329	69	70 (F07)	4xØ10	14	140	47	11,6	S02-C150	124	32	150	65
200	8"	200	17	28	174	237	90	60	329	69	70 (F07)	4xØ10	18	192	70	16,7	S02-C150	124	32	150	65
250	10"	250	22	30	207	269	125	68	n/a	n/a	102 (F10)	4xØ12	18	243	91	32,5	S05-W250	157	36	250	74
300	12"	300	22	30	249	309	125	78	n/a	n/a	102 (F10)	4xØ12	18	293	113	45,5	S05-W250	157	36	250	74