


S51 ALUMINIUM LIGHT WEIGHT DESIGN WAFER TYPE BUTTERFLY VALVE



Light weight design
 Pressure class, 16 bar
 Design according EN 593
 Face to face Wafer short,
 acc. EN558-1/2 Series 20 / API 609 A
 Flange connections options: EN 1092 PN 6, 10 and 16
 ASME B16.5 cl. 150
 JIS 5K/10K/16K
 Material options: Body material Aluminium Alloy
 Disc material Stainless steel A351 CF8M
 Shaft material SS 416
 Liner material EPDM
 Lever material Aluminium Alloy

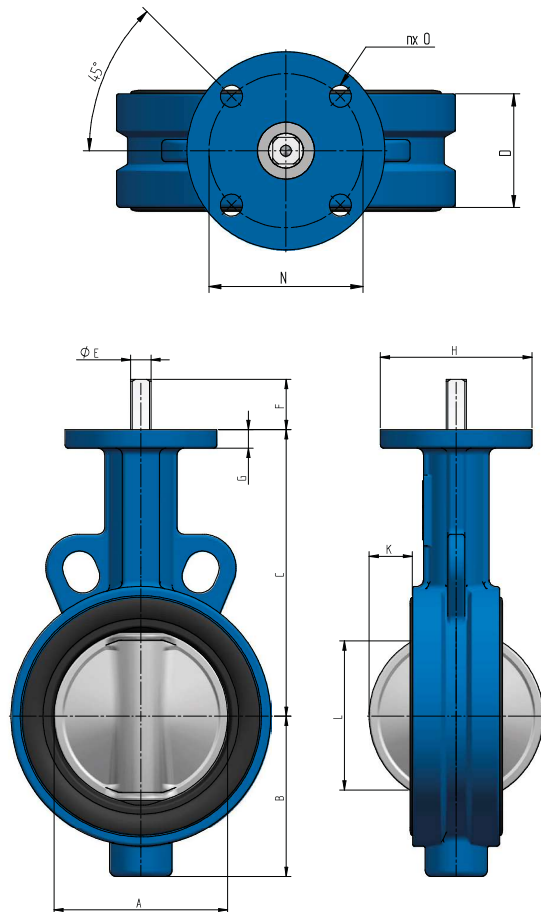

DN	NPS	øA	E	F	B	C	øH	D	M	P	N (PCD)	N x Ø	G	L	K	Weight kg (bare shaft)
40	1 1/2"	40	flat 7	14	45	98	55	33	115	42	42 (F04)	4xØ6	10	23	3,5	0,41
50	2"	50	9	16	70	130	65	42	170	64	50 (F05)	4xØ7	13	30	4,7	1,32
65	2 1/2"	65	9	16	76	143	65	46	170	64	50 (F05)	4xØ7	13	49	11	1,52
80	3"	80	9	16	89	155	65	46	170	64	50 (F05)	4xØ7	13	68	18	1,64
100	4"	102	11	19	104	170	90	52	200	70	70 (F07)	4xØ10	14	90	26	2,89
125	5"	125	14	25	120	190	90	56	260	75	70 (F07)	4xØ10	14	114	35	3,96
150	6"	150	14	25	132	210	90	56	260	75	70 (F07)	4xØ10	14	140	47	4,75
200	8"	200	17	39	167	243	125	60	355	64	102 (F10)	4xØ12	18	192	70	9,7
250	10"	250	22	39	202	282	125	68	355	64	102 (F10)	4xØ12	18	243	91	14
300	12"	300	22	39	239	310	150	78	505	69	125 (F12)	4xØ14	18	293	113	21

ALFA
EUROPE

Oosterveldsingel 37
 7558 PJ Hengelo (OV)
 The Netherlands

T: +31 74 30 31 940
 F: +31 74 30 31 946
 E: info@alfa-europe.com

WWW.ALFA-EUROPE.COM