


DOUBLE FLANGED TYPE S46

ELECTRIC ACTUATOR

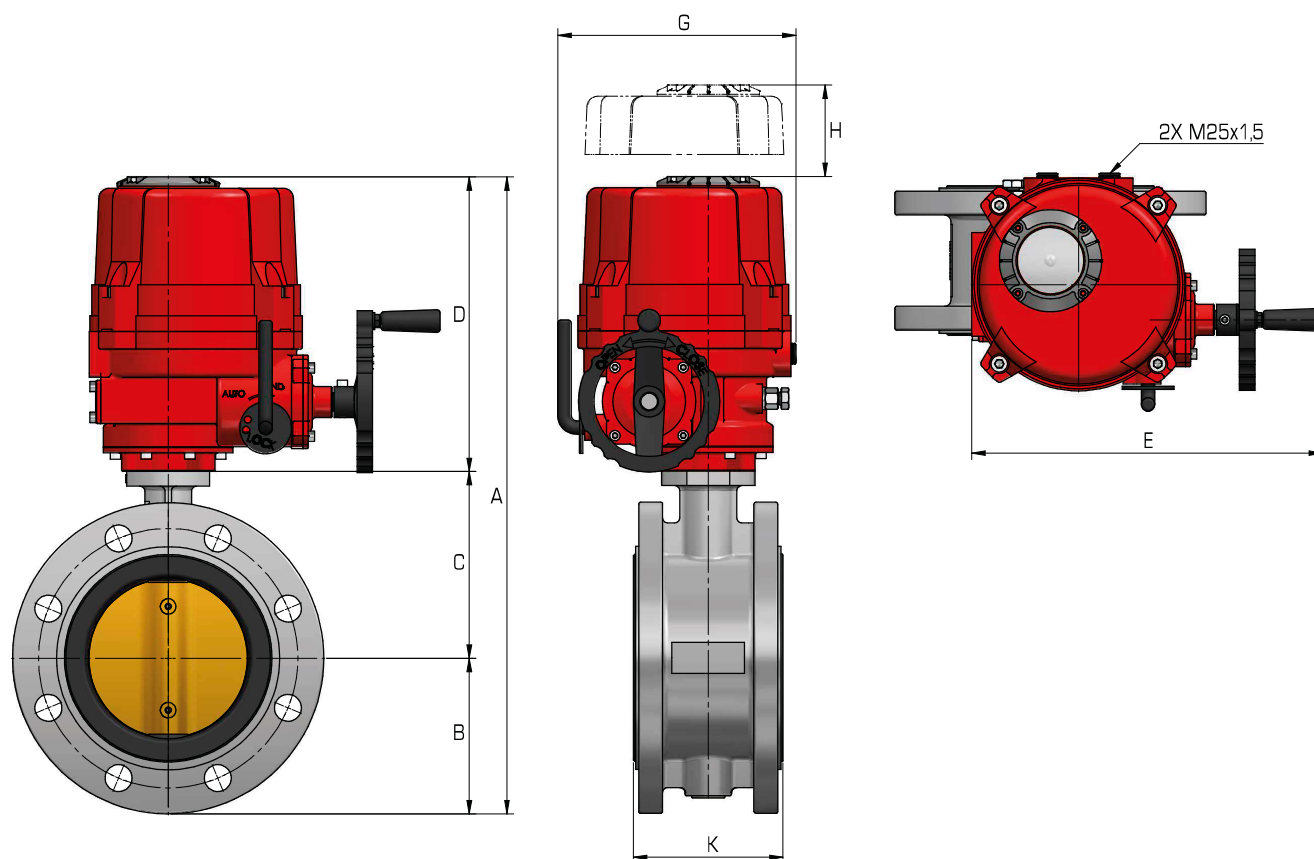

Standard available materials:

Body	Disc	Shaft	Seat
EN-JS1030	BS1400 AB2	SS 1.4122	NBR
A216 WCB	EN-JS1030	SS 431	EPDM
SS 1.4408	SS 1.4408	SS 1.4462	
BS1400 AB2	SD 2507	SD F53	

Electric actuator, quarter turn, ITQ


- Enclosure standard Weatherproof IP67 or IP68
- Power supply 24VDC, 110V, 220V or 380~440VAC
- 4pcs open/close mech. limit switches
- 2x torque switches
- Build in thermal protection
- Travel angle 90 degr. $\pm 5^\circ$
- Visual position indicator
- Manual override handwheel

Many available options: modulation control, BUS communication, explosion proof, local control unit, etc.

DN	Type	A	B	C	D	E	G	H	K	Weight \pm kg
40	ITQ160	458	61	113	284	338	229	140	106	22,2
50	ITQ160	469	67	118	284	338	229	140	108	23
65	ITQ160	484	74	126	284	338	229	140	112	23,8
80	ITQ160	499	82	133	284	338	229	140	114	25
100	ITQ160	531	100	147	284	338	229	140	127	28,1
125	ITQ160	556	112	160	284	338	229	140	140	33
150	ITQ160	598	134	180	284	338	229	140	140	38,1
200	ITQ240	647	159	204	284	338	229	140	152	58

DOUBLE FLANGED TYPE S46

ELECTRIC ACTUATOR

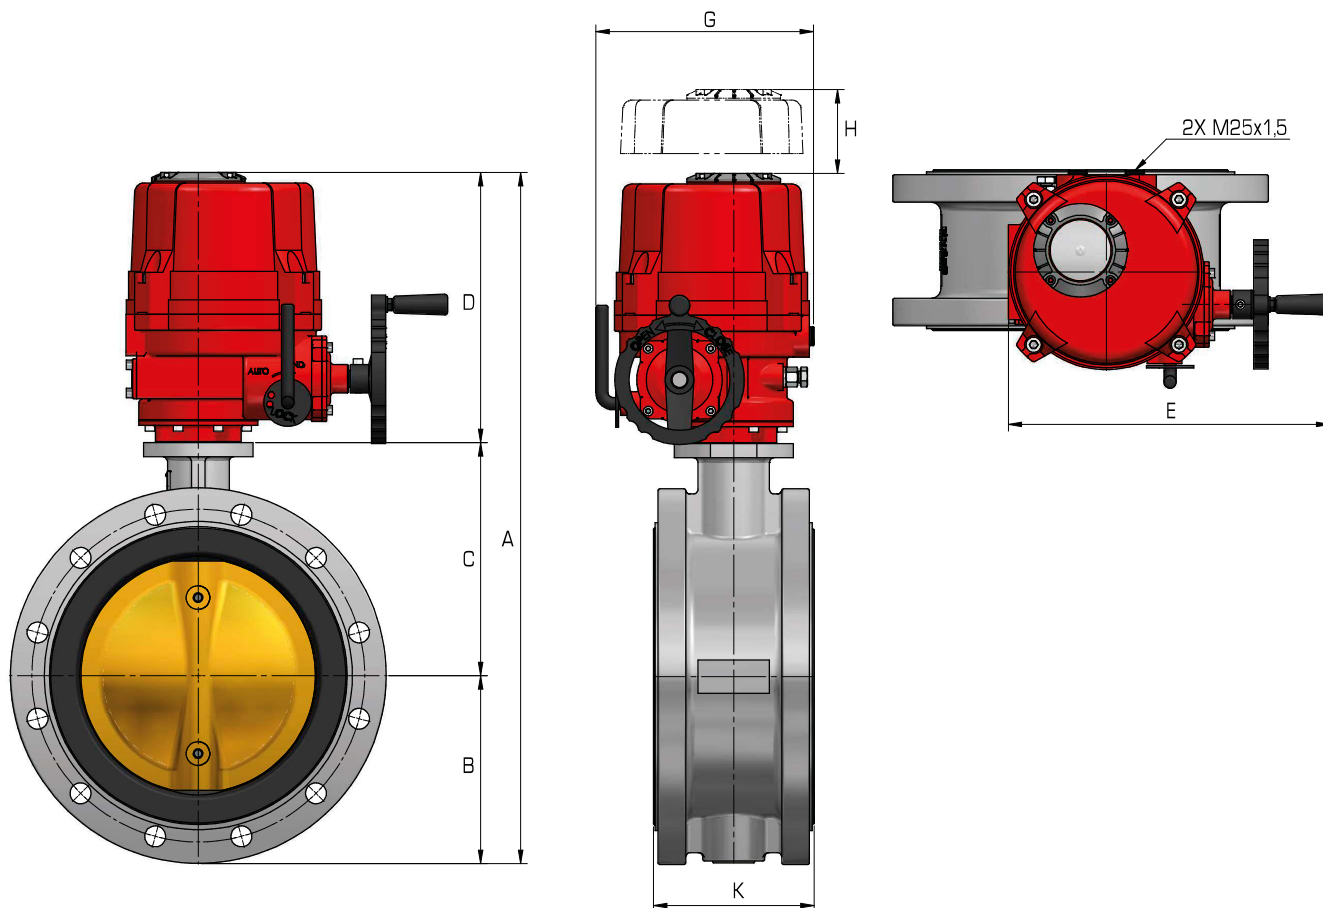

Standard available materials:

Body	Disc	Shaft	Seat
------	------	-------	------

EN-JS1030	BS1400 AB2	SS 1.4122	NBR
A216 WCB	EN-JS1030	SS 431	EPDM
SS 1.4408	SS 1.4408	SS 1.4462	
BS1400 AB2	SD 2507	SD F53	

Electric actuator, quarter turn, ITQ

- Enclosure standard Weatherproof IP67 or IP68
- Power supply 24VDC, 110V, 220V or 380~440VAC
- 4pcs open/close mech. limit switches
- 2x torque switches
- Build in thermal protection
- Travel angle 90 degr. $\pm 5^\circ$
- Visual position indicator
- Manual override handwheel

Many available options: modulation control, BUS communication, explosion proof, local control unit, etc.

DN	Type	A	B	C	D	E	G	H	K	Weight \pm kg
250	ITQ350	753	195	245	313	357	244	170	72	72
300	ITQ500	803	220	270	313	357	244	170	97	97
350	ITQ500	910	282	315	313	357	244	170	115	115
400	ITQ800	995	307	350	338	380	287	195	126	126
450	ITQ1100	1065	352	375	338	380	287	195	179	179
500	ITQ2000	1187	387	415	385	440	375	225	212	212
600	ITQ2000	1402	452	565	385	440	375	225	273	273

Bigger sizes on request